

CU universal plate lifting clamps



Lifting clamps for safely transporting steel plates in vertical position.

Minimum weight to be lifted is 10% of the safe workload.

Properties


- Equipped with universal lifting eye, movable in two directions.
- Always equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered.
- WLL and size of the jaw opening are clearly indicated on the clamp.
- Safety factor of at least 5 x WLL.
- Each clamp is 2x WLL testloaded.

Application

- For lifting steel plates up to a hardness of 37 RC (345 HB).
- Suitable for lifting, 180 ° turning and vertical transport of steel plates.

Norm:

- EN12100-1/2, EN13155, AS4991, ASME-B30,20

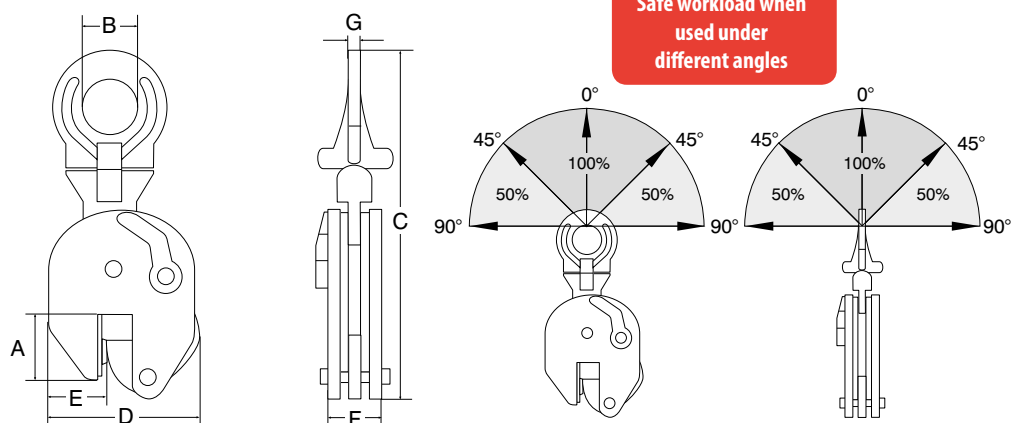

Type	WLL (kg)	Jaw opening (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)	ProductId
CU-0.75	750	0-13	47	30	203	100	35	37	10	1.7	3362001
CUE-1.0	1000	0-25	55	50	295	125	38	47	14	3.9	3362002
CU-2.0	2000	0-35	80	70	370	185	55	56	16	7.3	3363002
CU-3.0	3000	0-35	80	70	370	185	55	56	16	8	3363003
CU-4.0	4000	0-45	85	70	430	230	60	78	20	17	3363004
CU-6.0	6000	0-50	114	78	527	255	78	78	32	22	3363006
CU-9.0	9000	0-55	112	78	565	267	70	86	45	30	3363009
CU-12.0	12000	0-52	148	85	650	295	100	94	48	44	3363013
CU-15.0	15000	0-76	159	85	765	373	136	106	48	75	3363015

